
# CREATION OF EMMAR INTERNATIONAL CO.,LTD

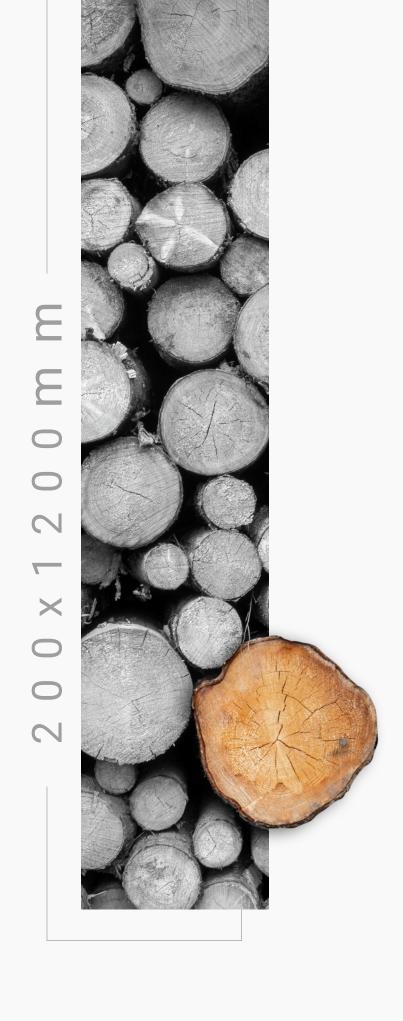

## MOULD WOODEN

P L A N K S T I L E S

Advantages

Size & Application

Product USP

Products





# ADVANTAGES



STAIN RESISTANT RESISTANT



FROST PROOF



CHEMICAL

SCRATCH RESISTANT

THERMO-IMPACT RESISTANT



RIFT RESISTANT




SLIP RESISTANT




ABSORPTION RESISTANT

ENVIRONMENT FRIENDLY

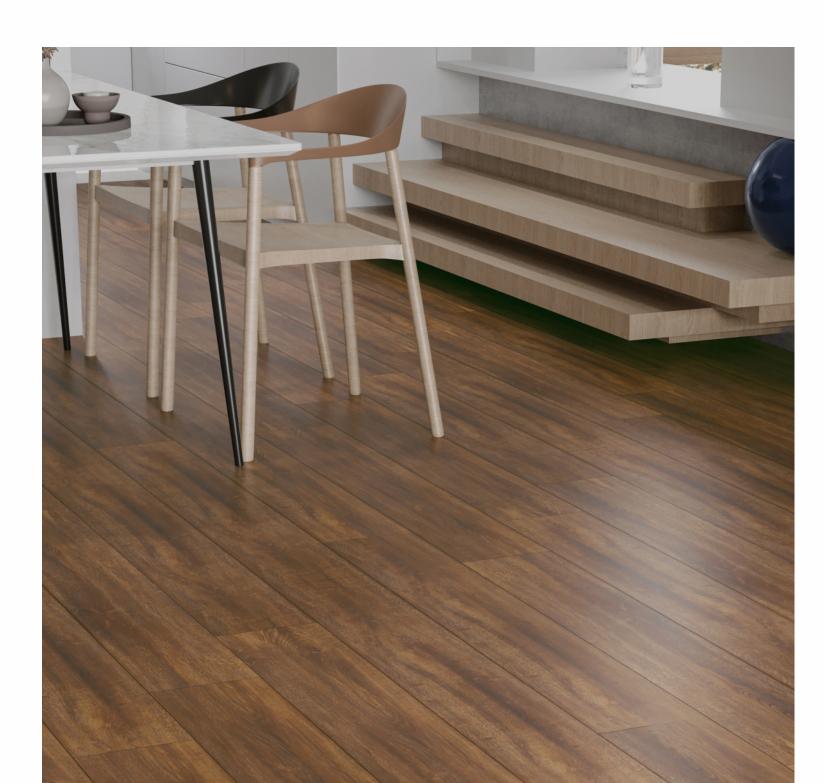

# SIZE & APPLICATION

Its 150x900mm, 200x1000mm, 200x1200mm, 200X1400 size gives your space a remarkable appearance and creates a pleasant ambiance across residential or business properties. We bring you a selection of flawlessly crafted tiles. As a result, your ideal area is designed with ease.

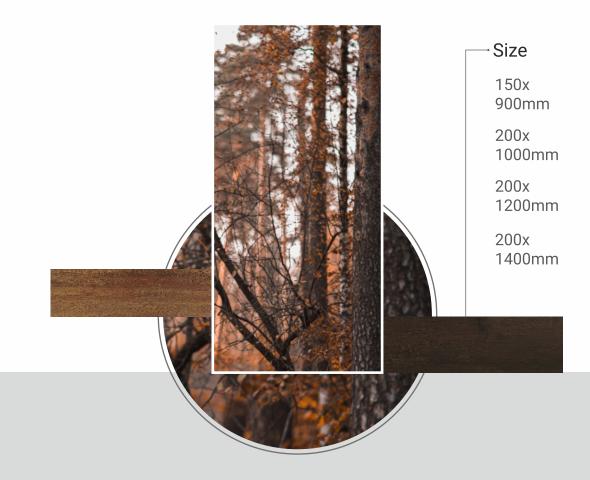













RRESTAURANT

OFFICES














02

01



PREMIUM TECHNOLOGY

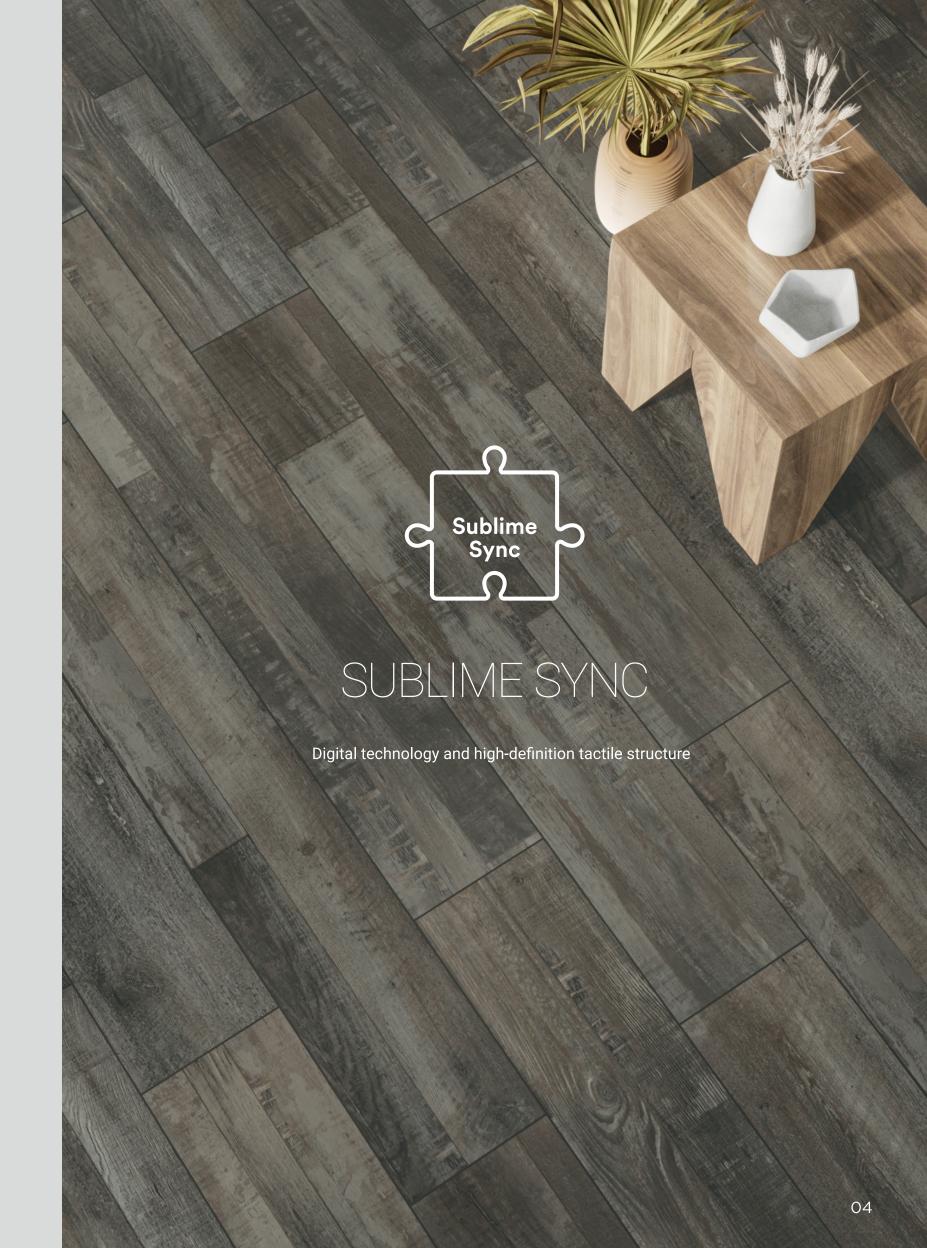



A non-rectified tile boasts gently curved outer edges, lending an authentic touch that enhances its traditional tiled aesthetic, creating a remarkably realistic appearance.



Embraced by an array of captivating brown hues, the entire collection exudes a sublime aesthetic that is both exquisite and sophisticated. Meticulously curated to cater to the discerning taste of design enthusiasts.



Experience the exquisite allure of natural wood essences, beautifully captured on a ceramic surface that seamlessly blends timeless charm with contemporary spaces of sophisticated design.








Immerse yourself in our Tiles, adorned with captivating textures and rustic designs meticulously arranged to evoke the illusion of a magnificent space. Experience unparalleled grandeur, as these patterns seamlessly blend to create an ambiance of unmatched splendor.




Every day, we push the boundaries of market standards by crafting our surfaces with cutting-edge machinery exported from the renowned markets of Italy and Spain.

This avant-garde equipment, imported from international destinations, enables us to manufacture products that redefine excellence in the industry.



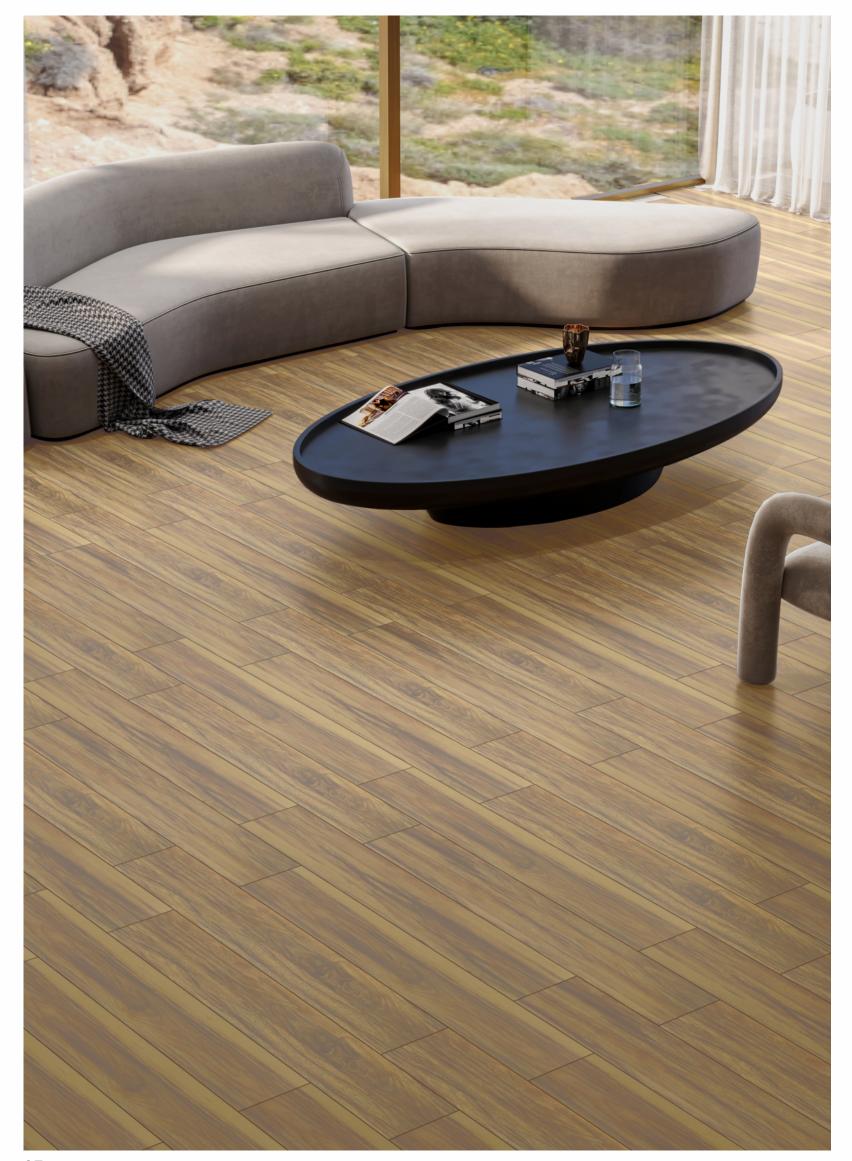


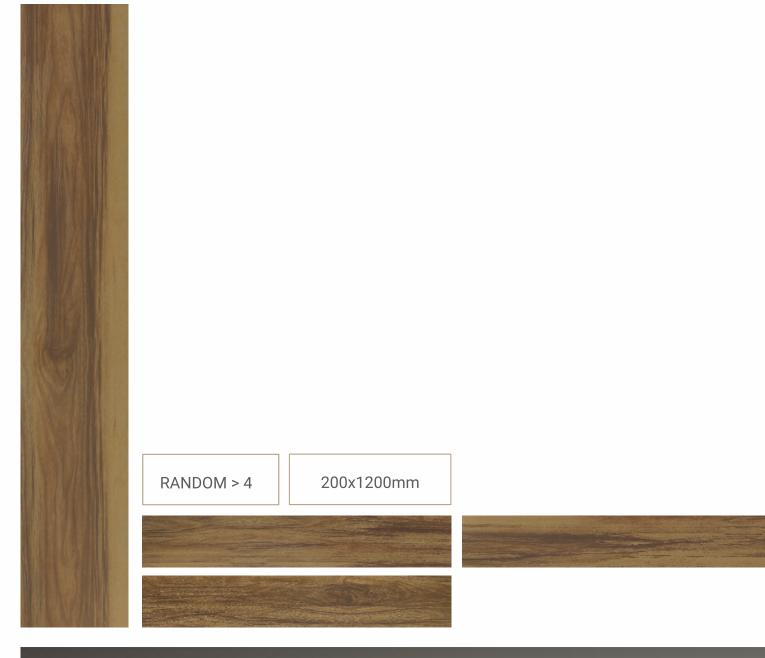








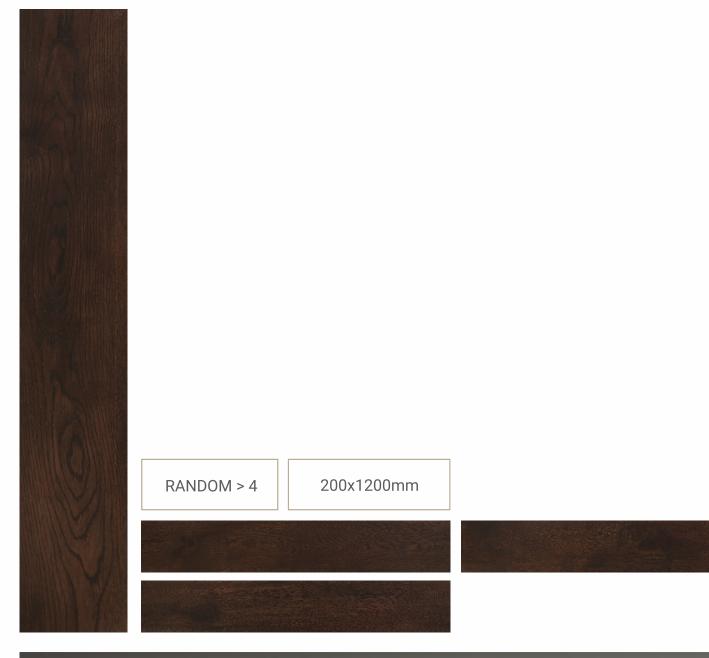








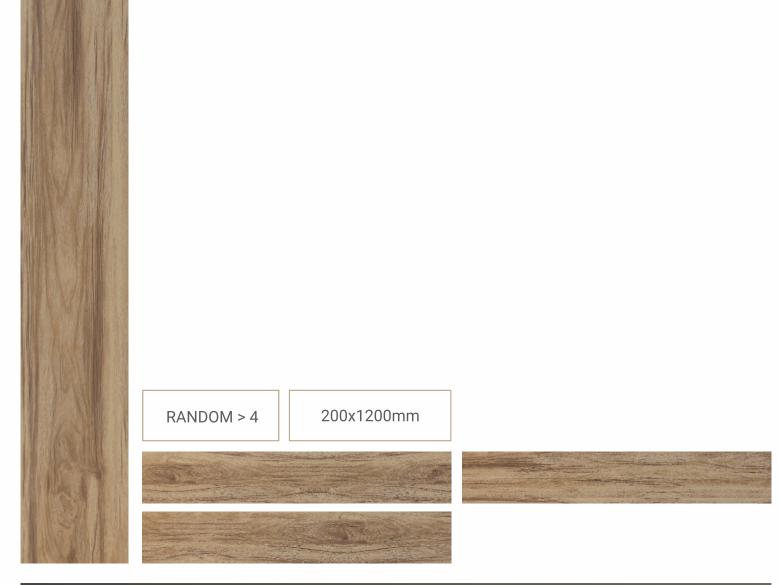





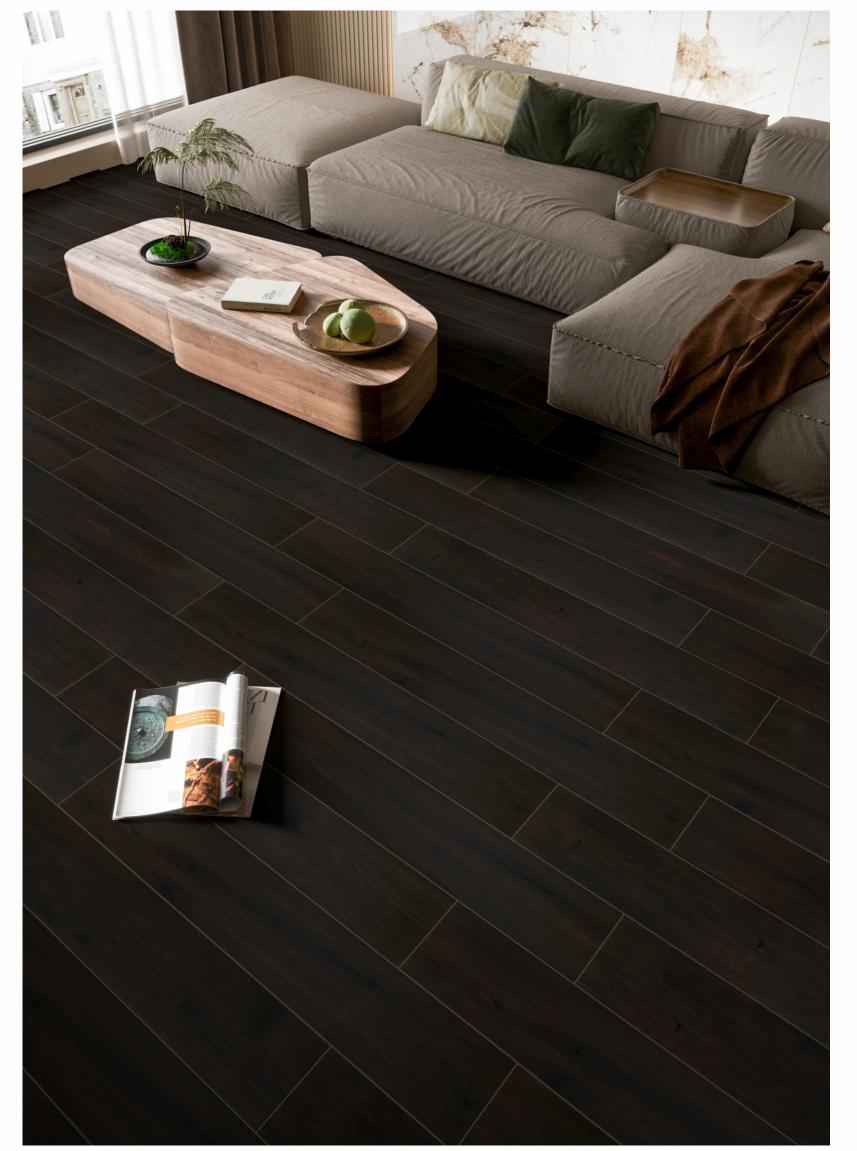












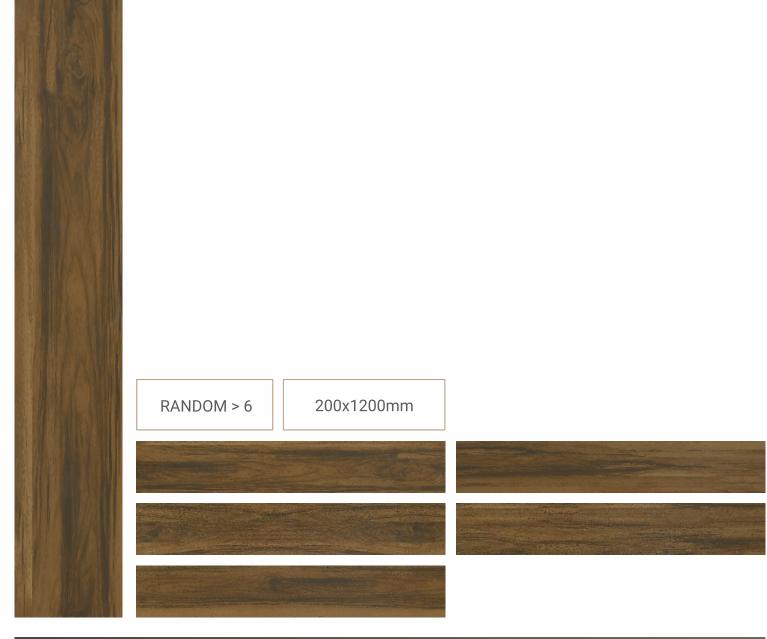



D 19 - 20901

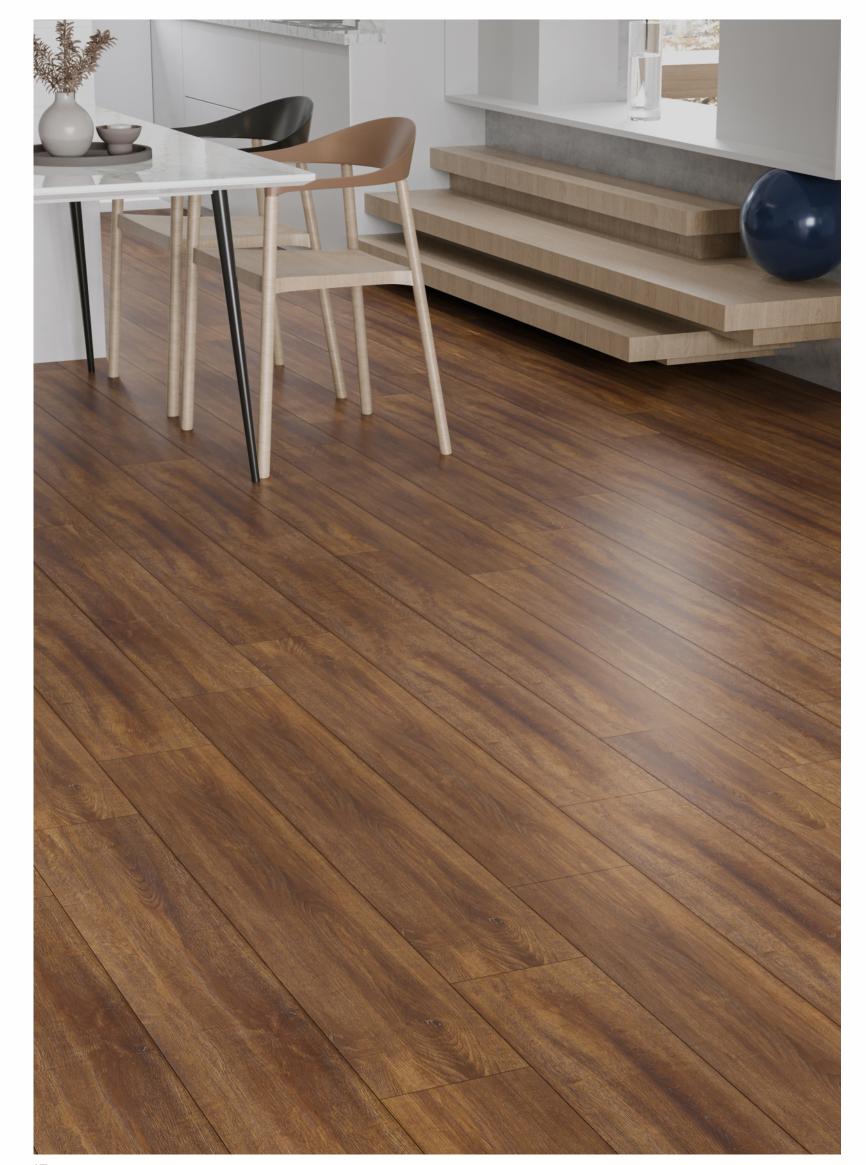


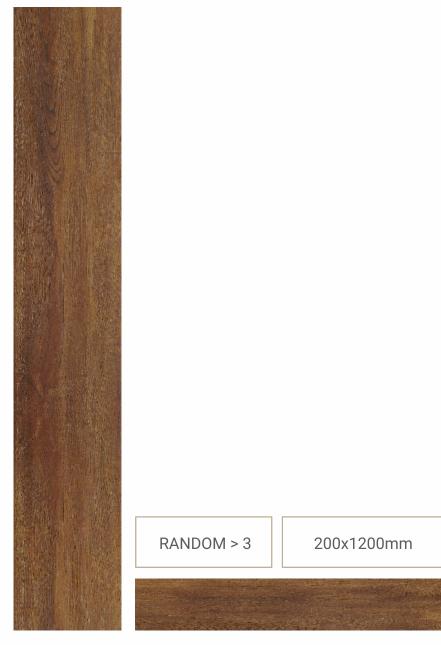








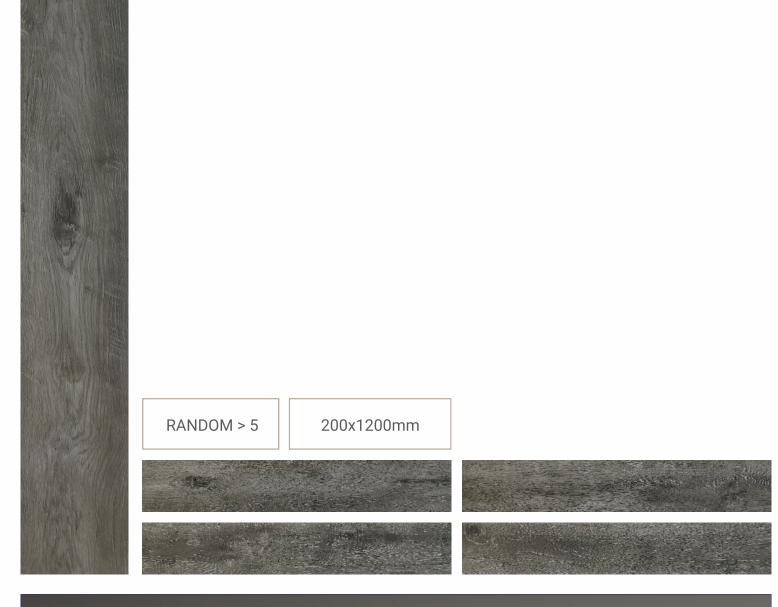




D 19 - 20903




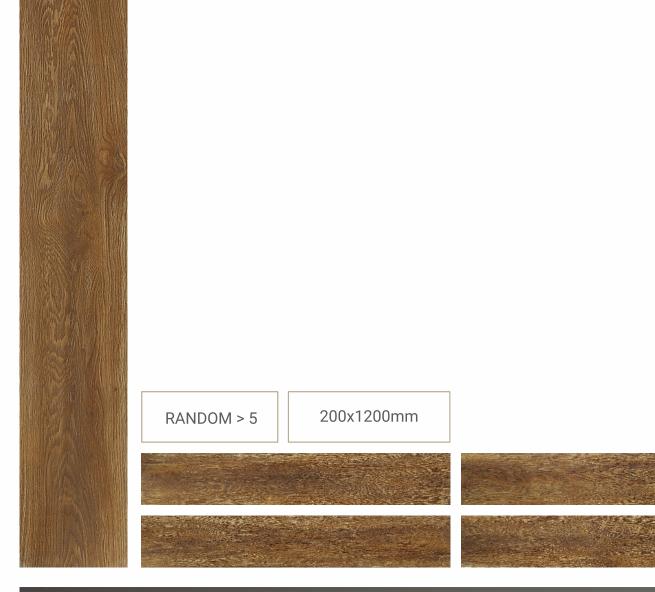






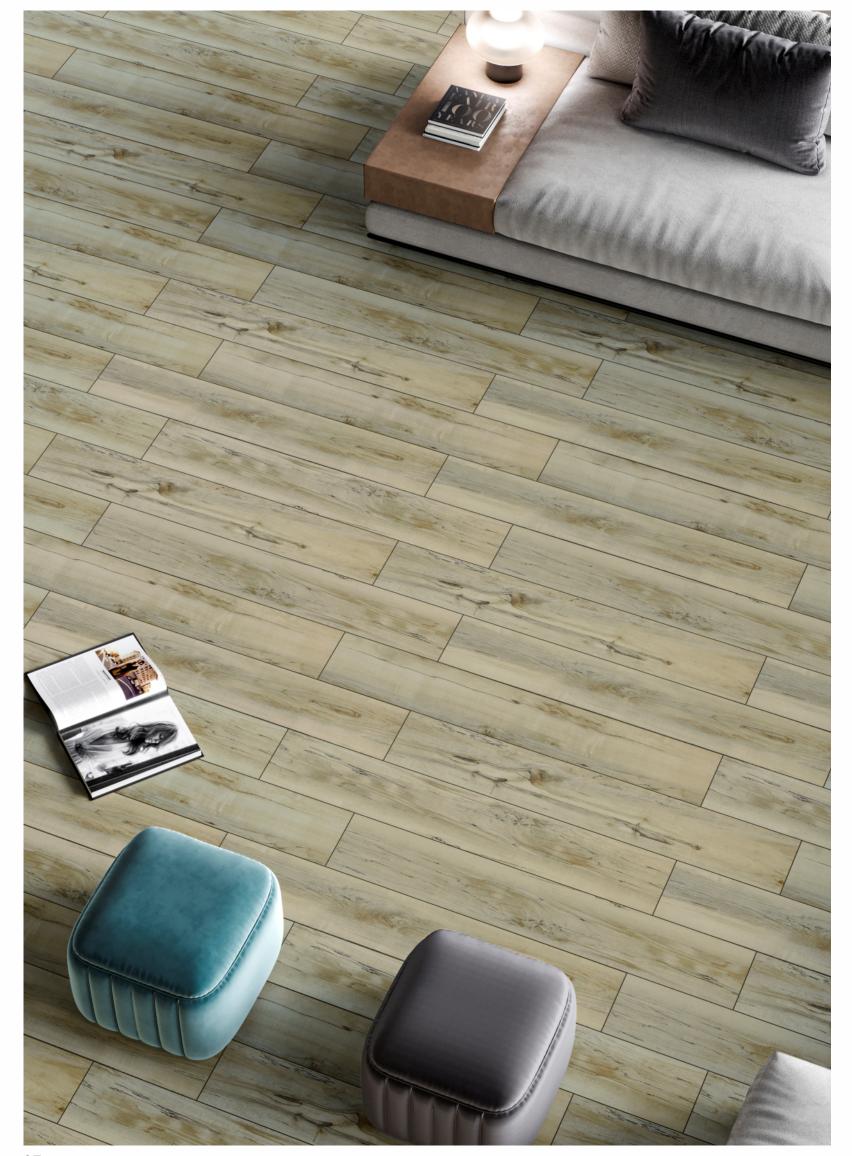


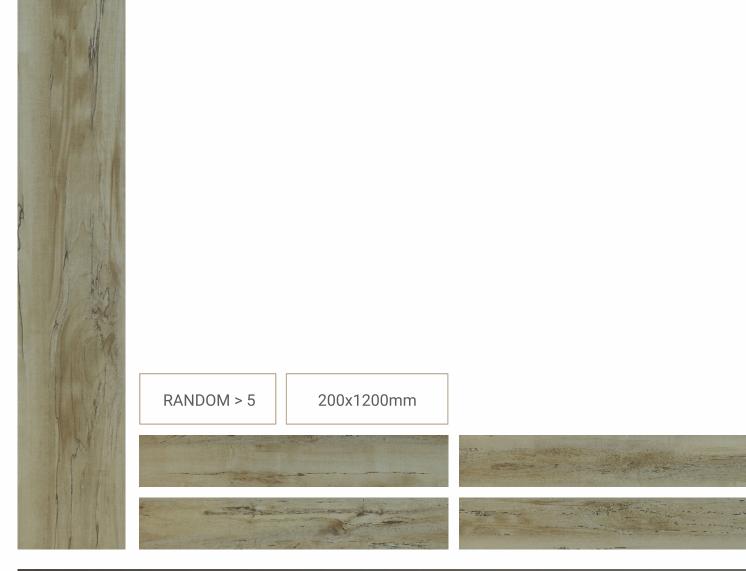




D 19 - 20905

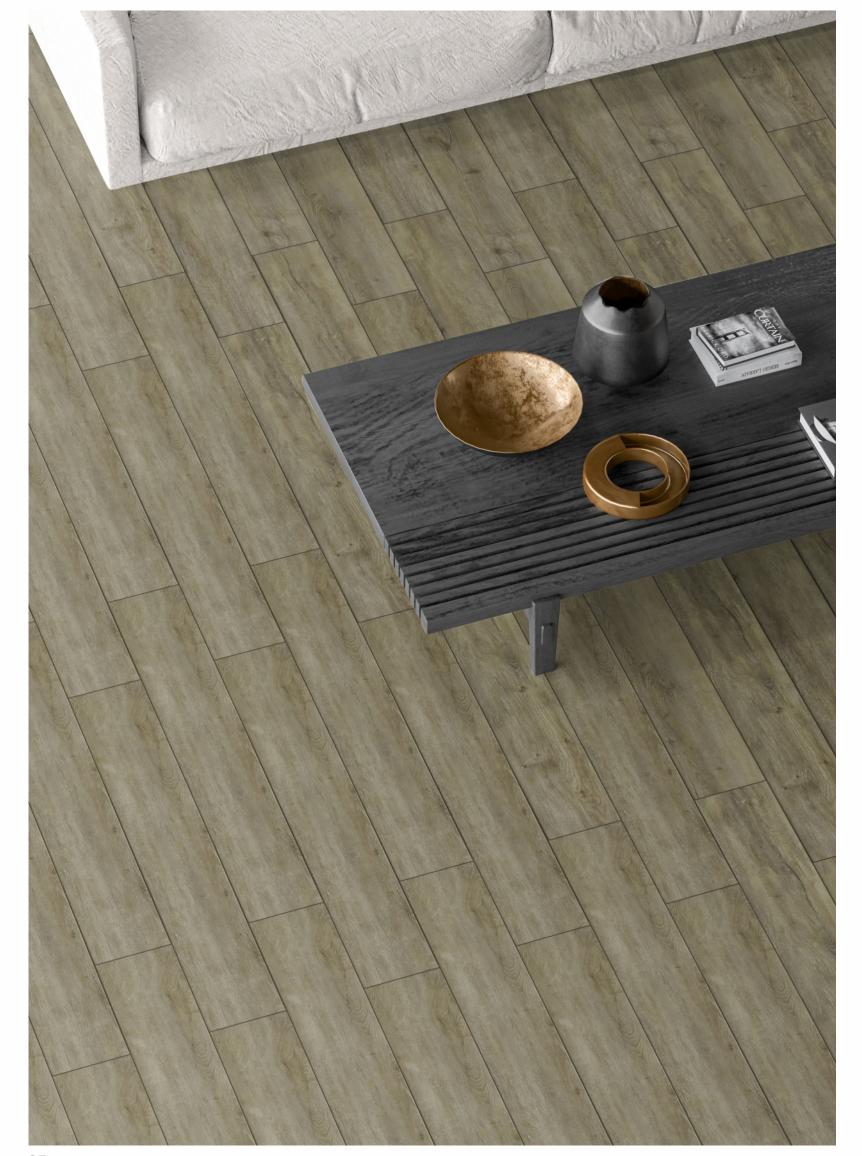


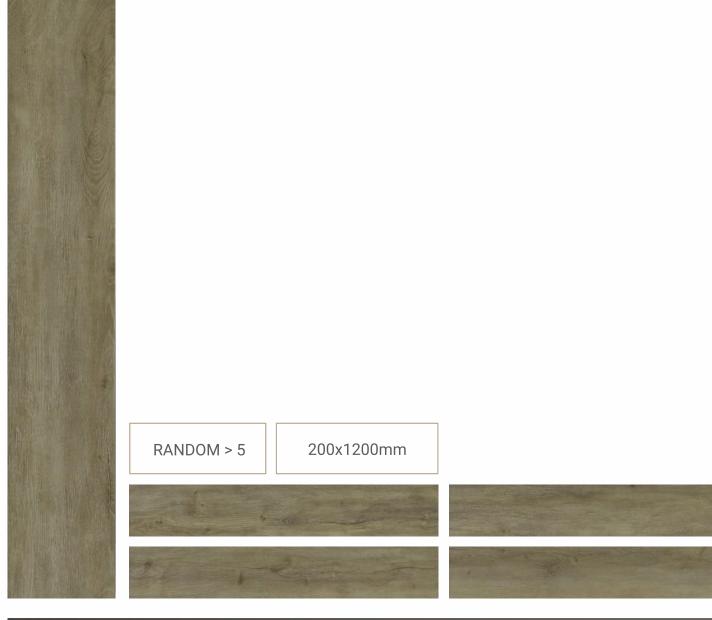





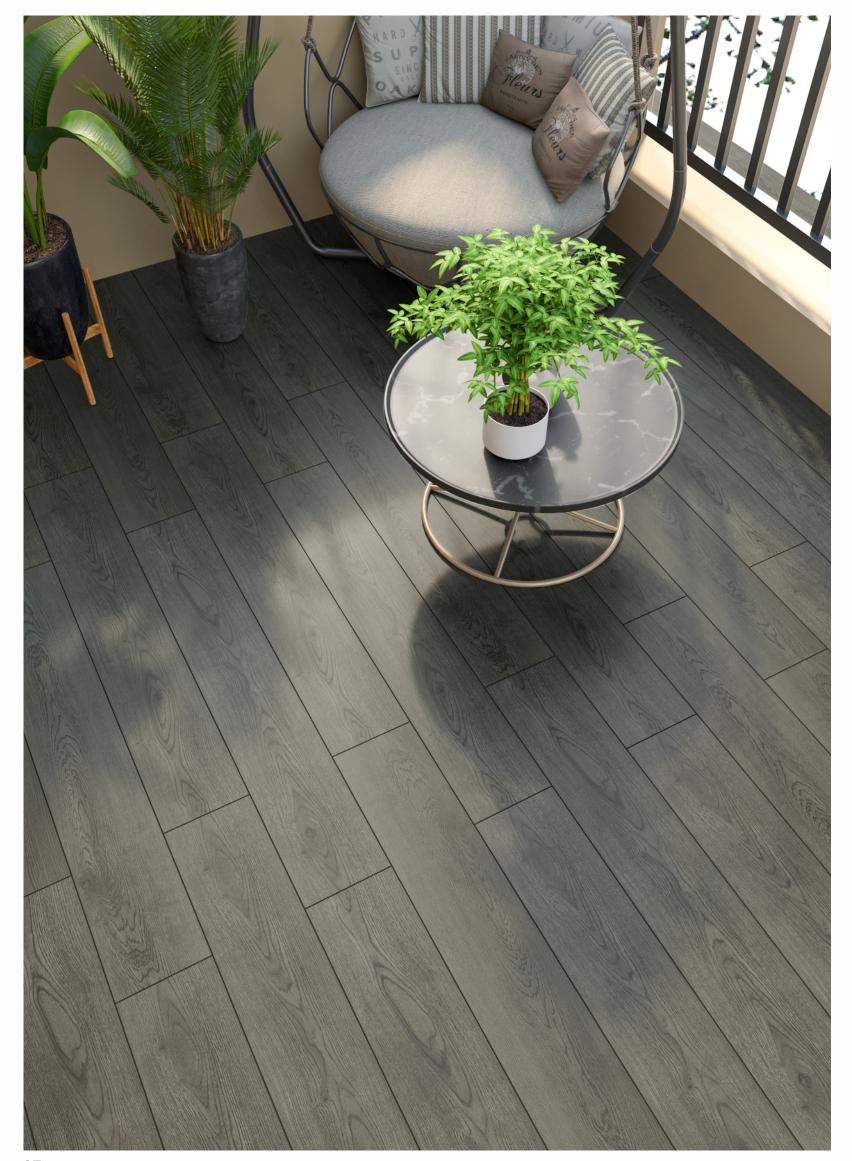

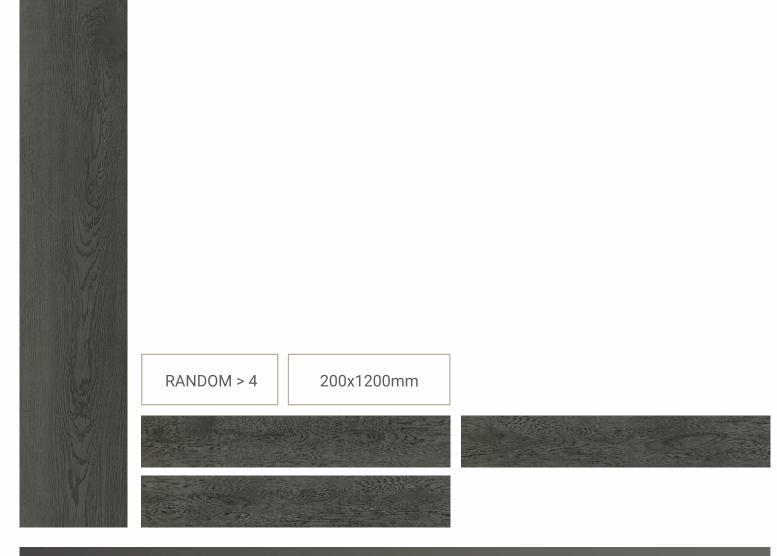












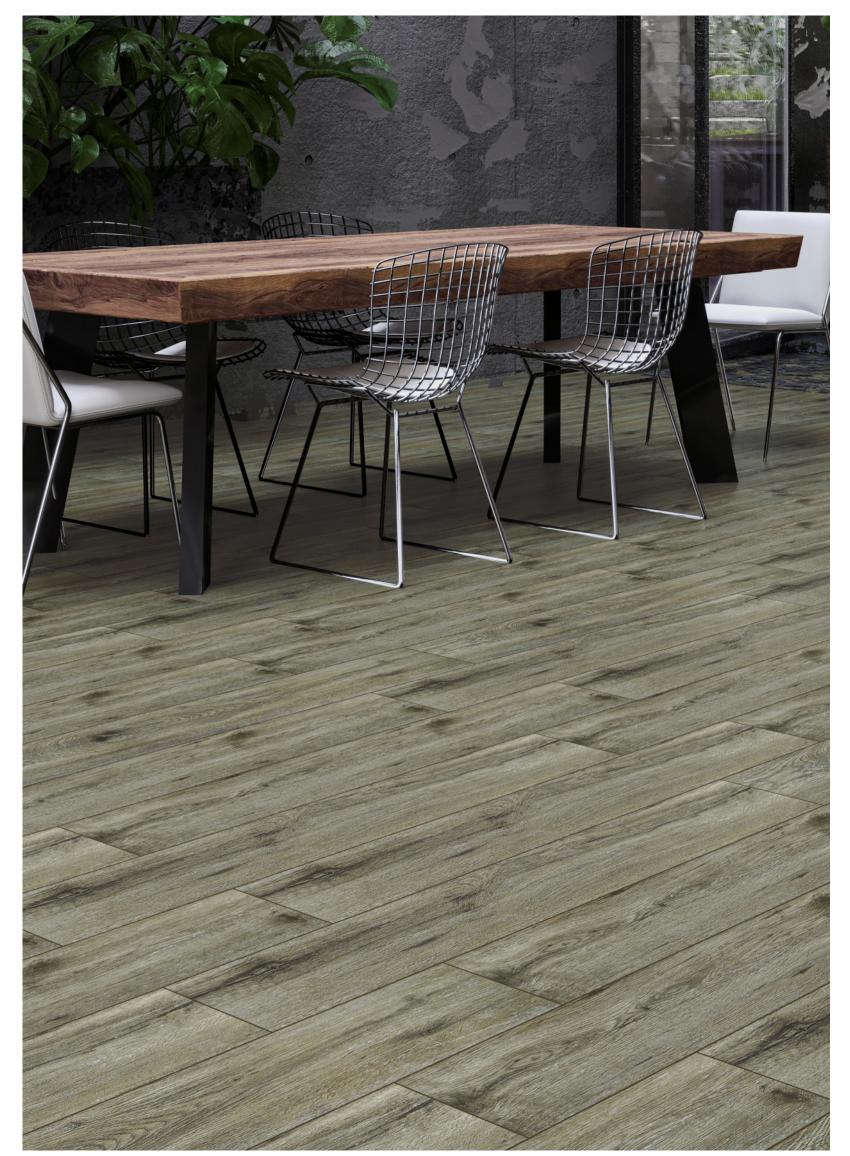



RANDOM > 3


200x1200mm










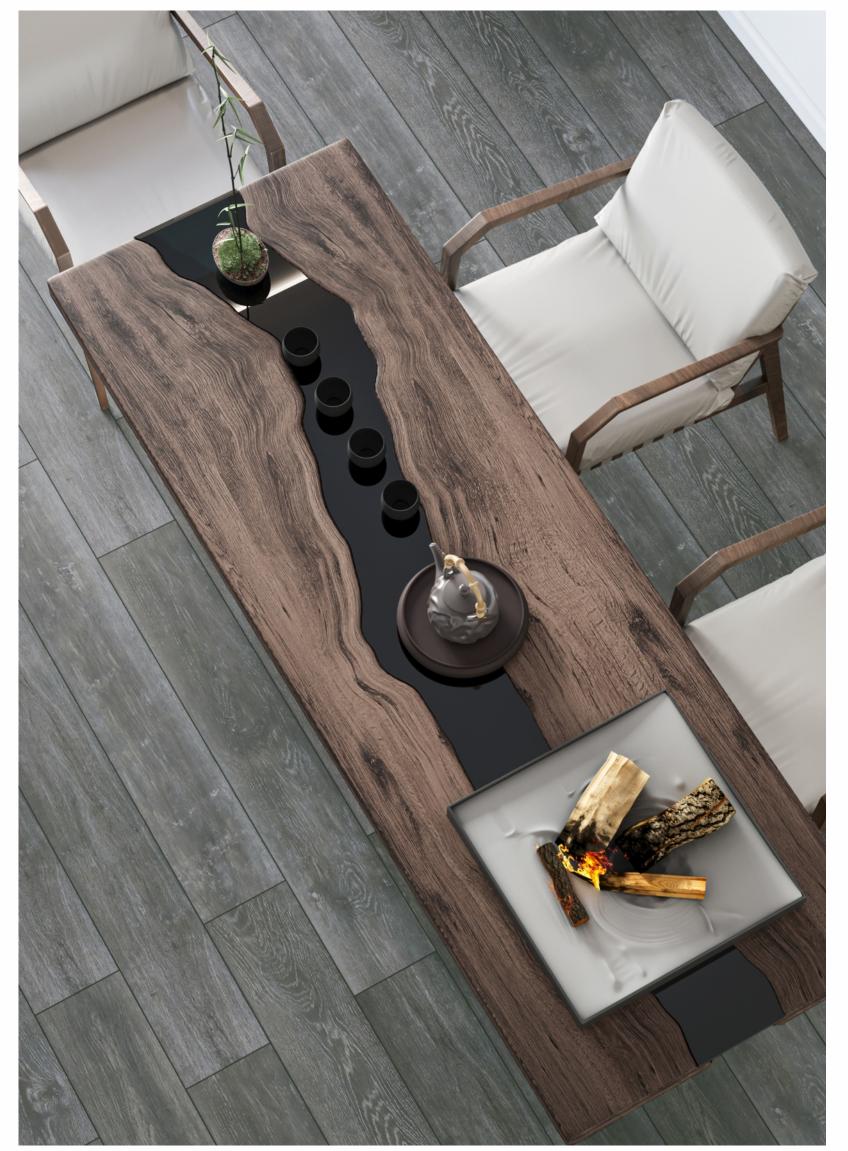


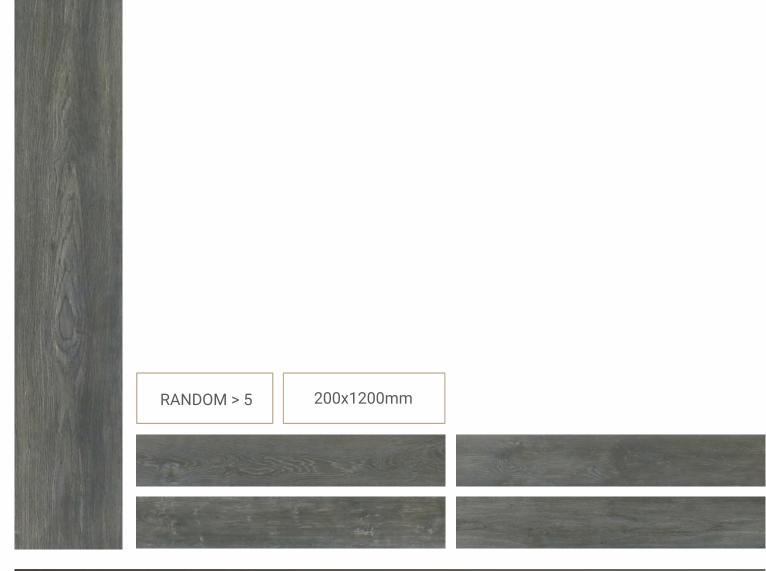









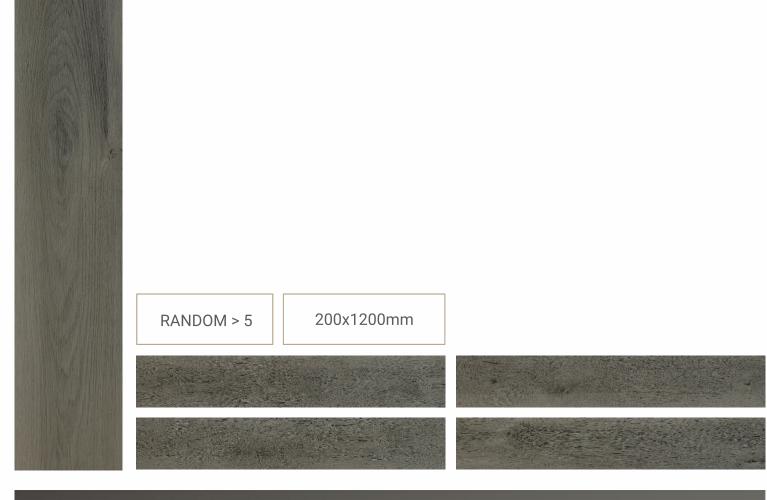





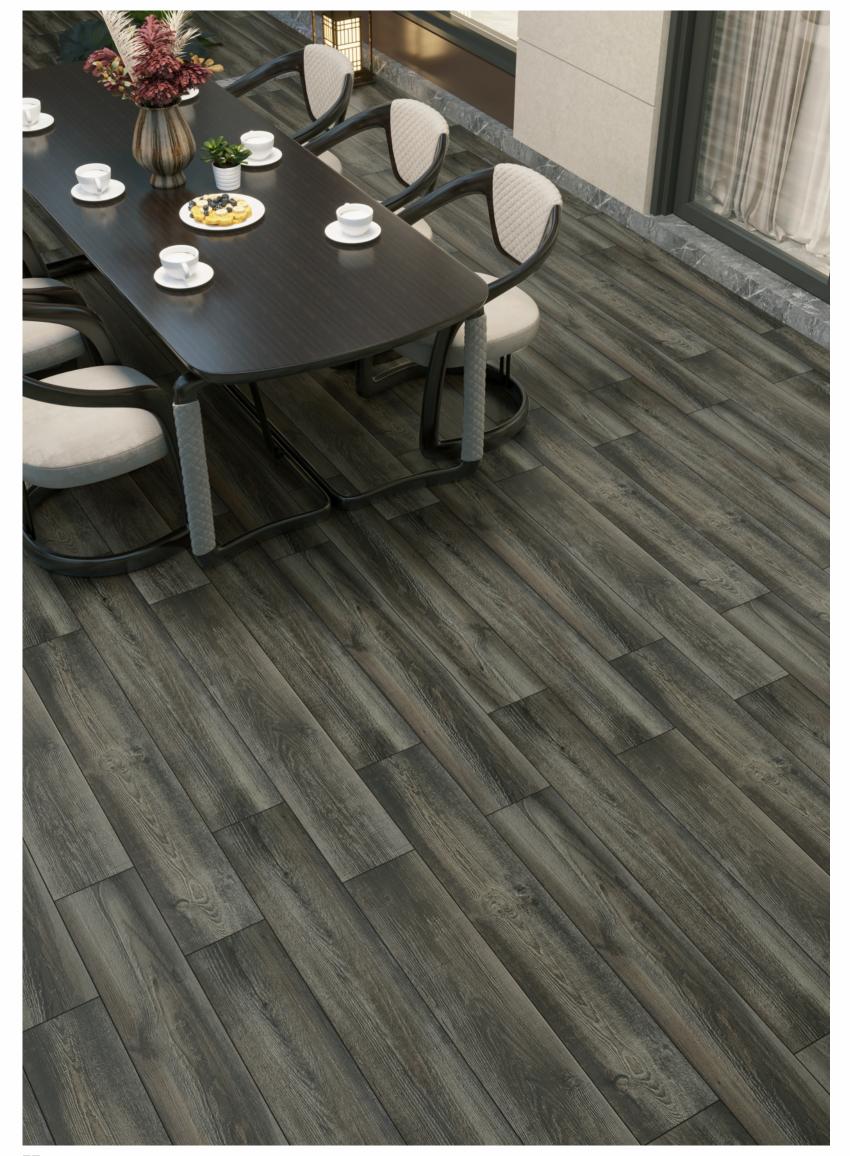


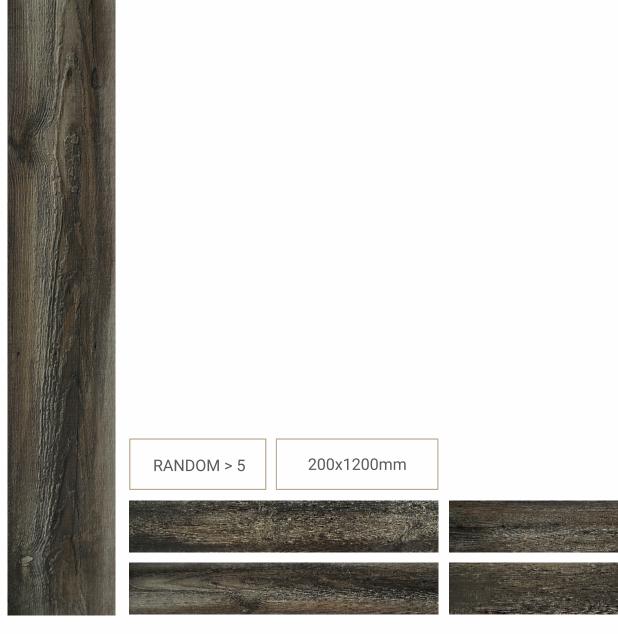








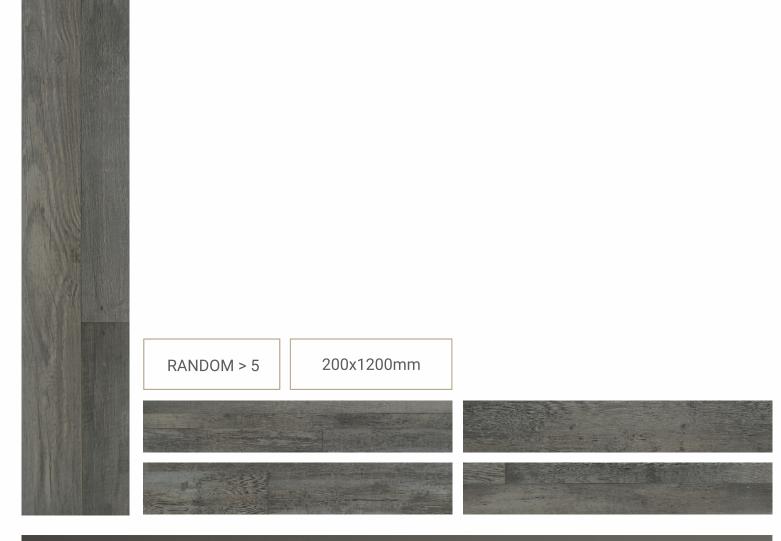









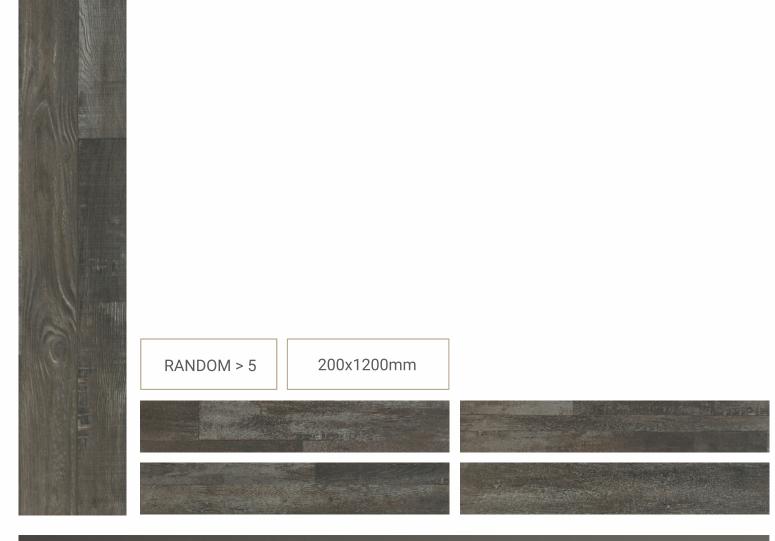





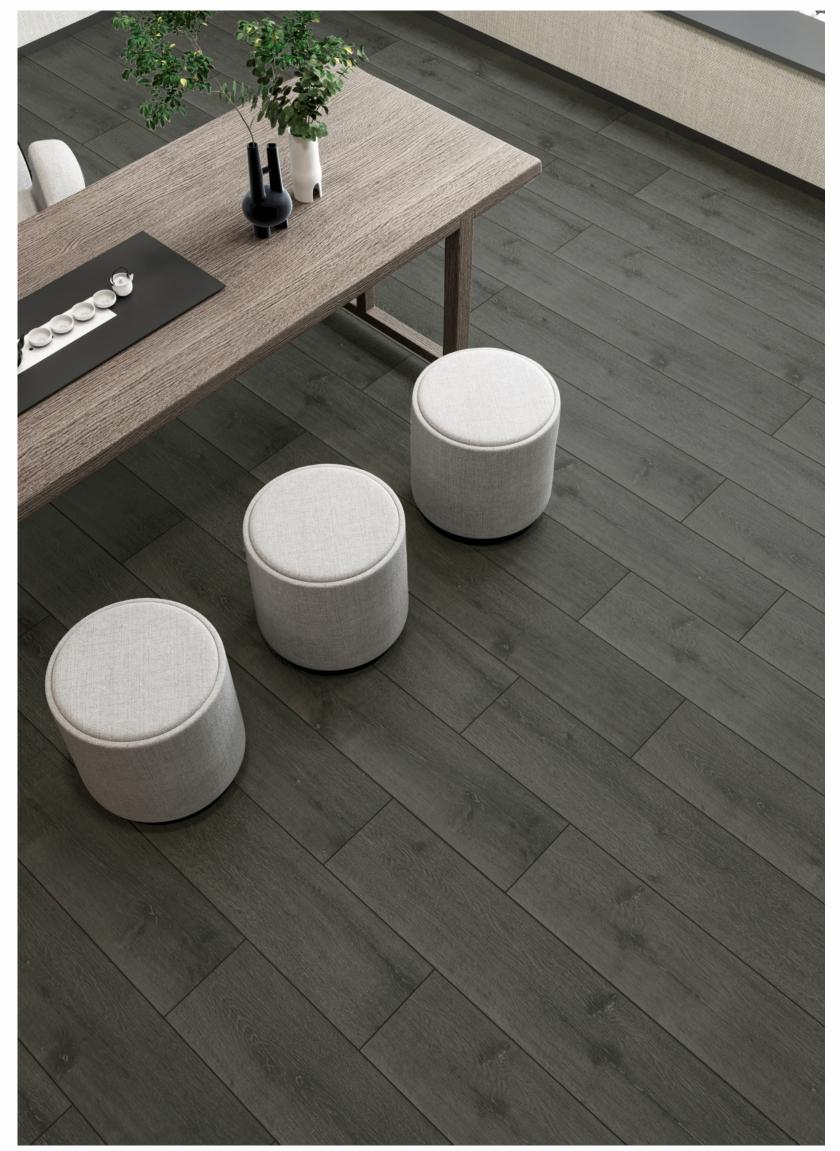


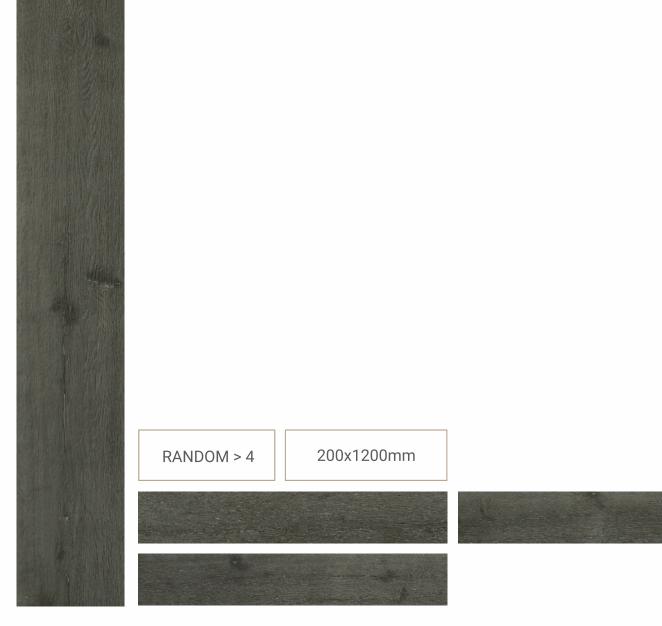







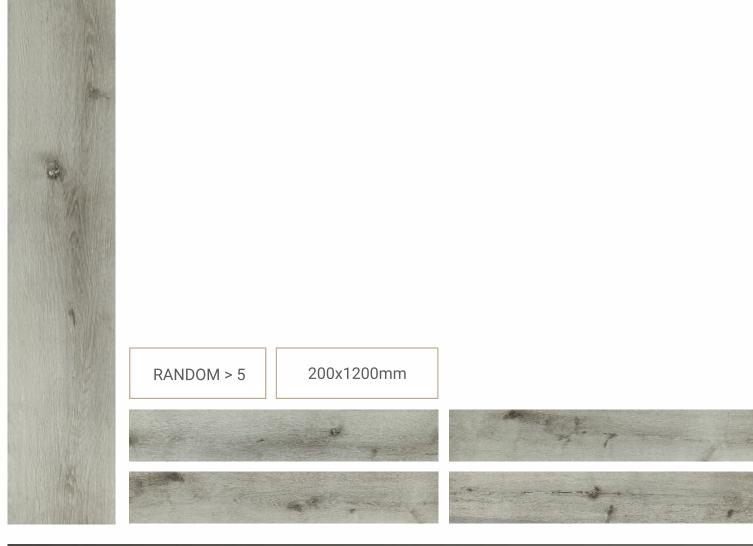
















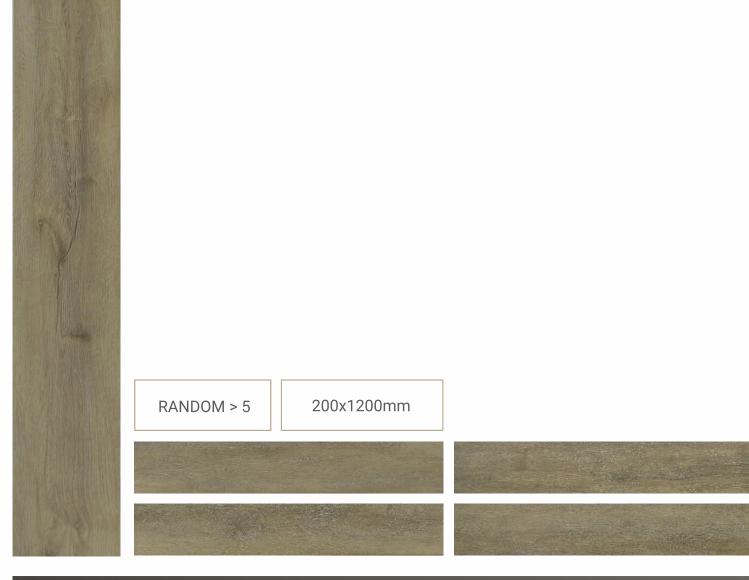



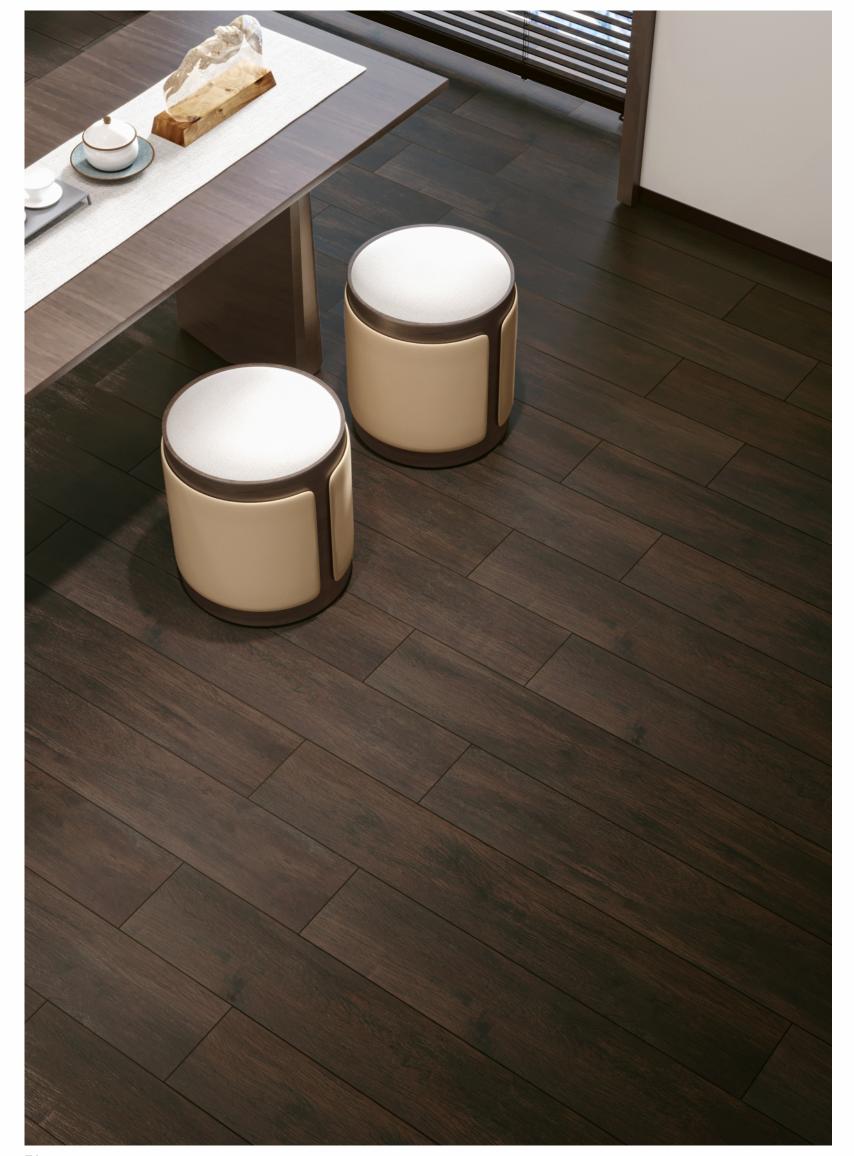

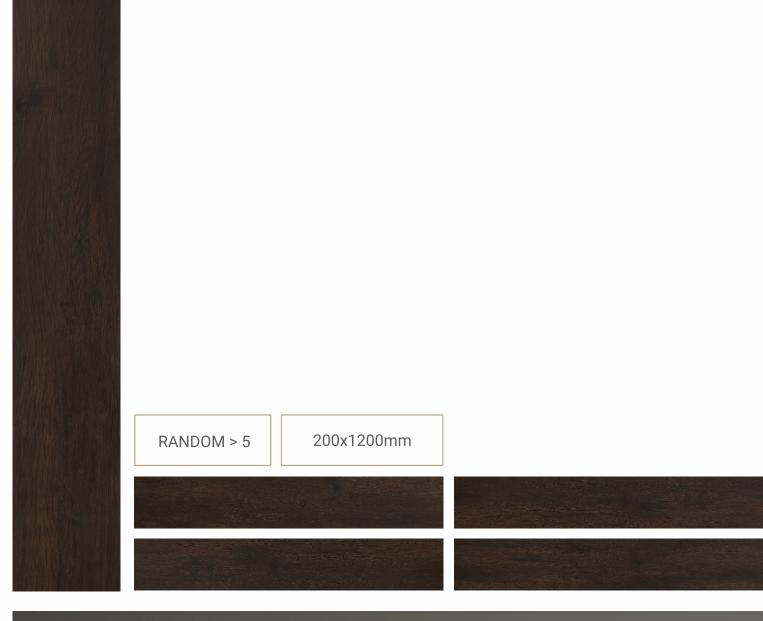















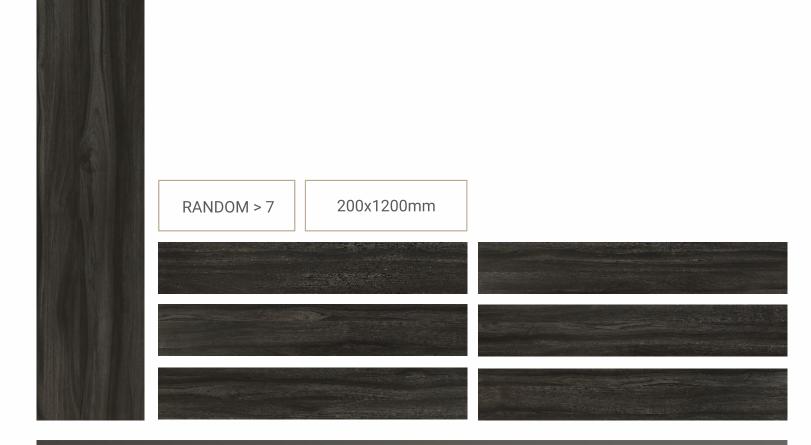









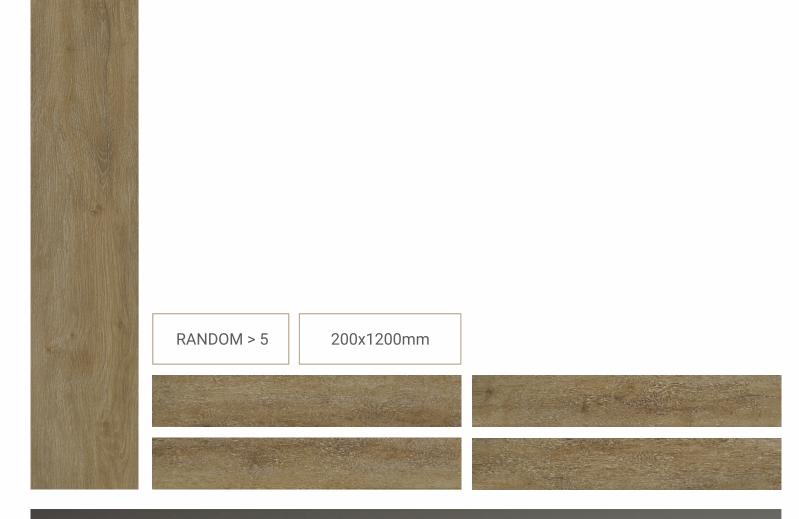





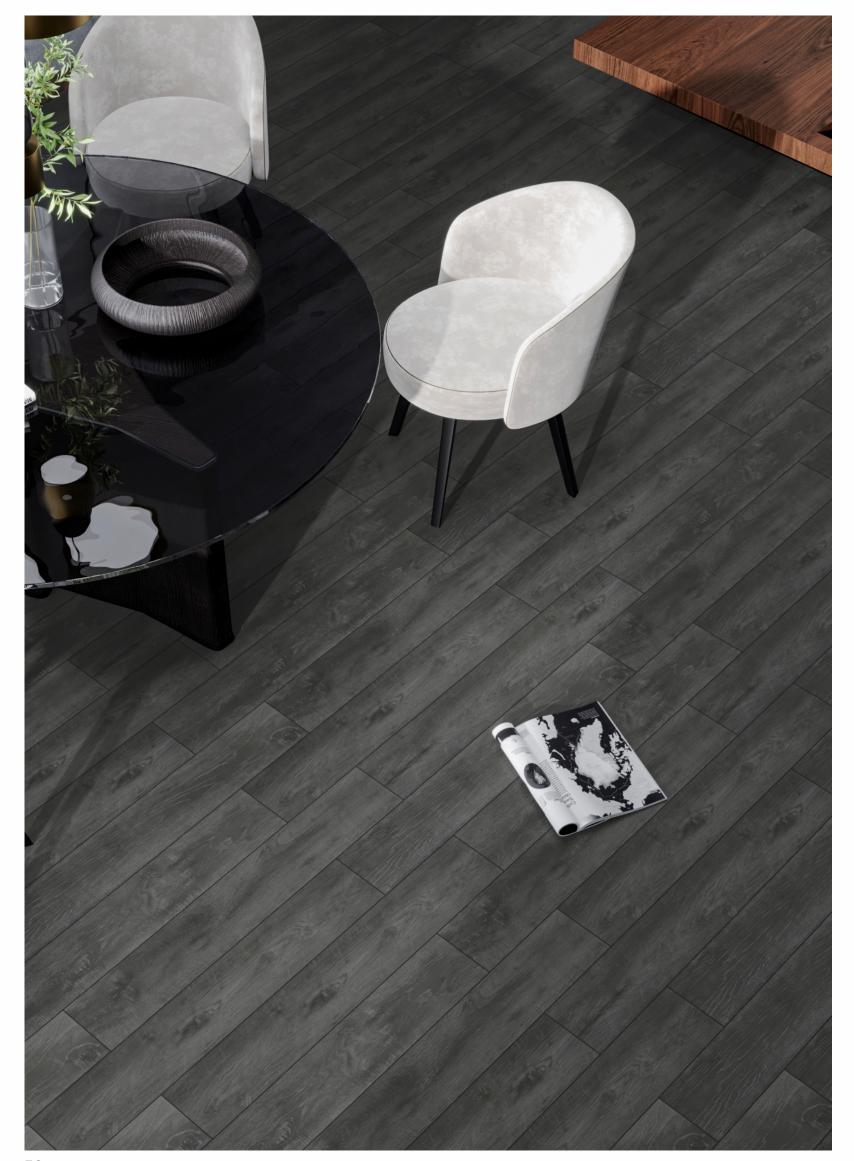


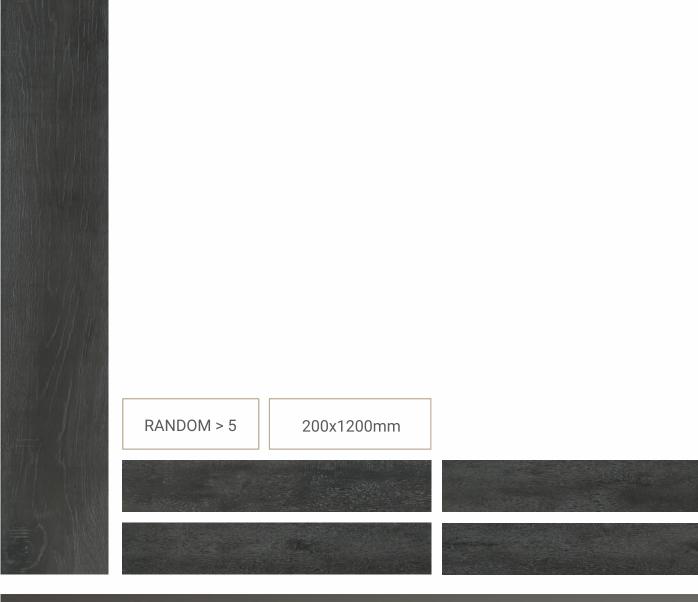







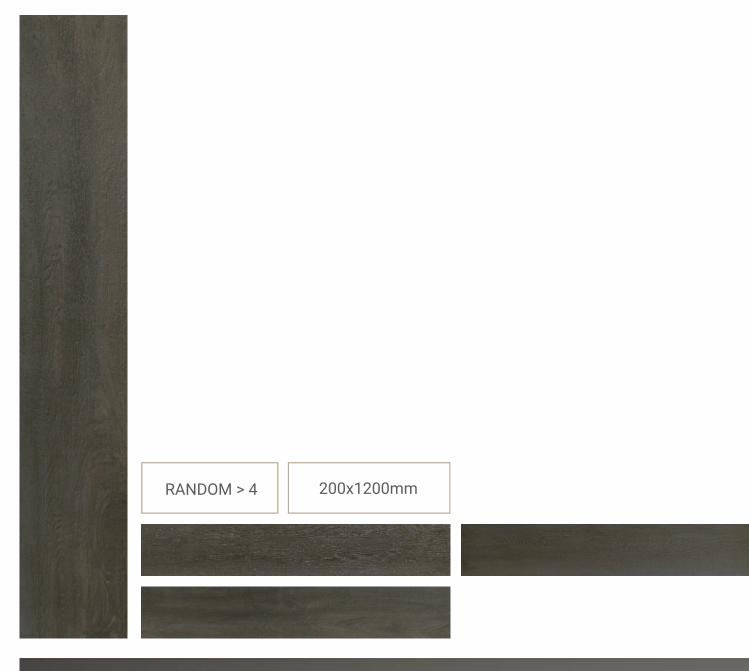



# PACKING DETAILS

Sr. No.	Size	No. of Tiles Per Box	Coverage Area in Sq. Feet	Approx. Weight / Box
1	200x1200mm	5	12.91sq.ft.	25kgs.

DISCLAIMER: Wooden Tiles reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications contained in this catalogue at anytime, the colors shown of tiles in this catalogue are purely illustrative and limited to printing process, please refer actual sample before final selection, the details of sizes, colors, references should be verified for typographical errors.

### LAYING INSTRUCTIONS

### TILES FIXING INSTRUCTIONS

- 1. All the tiles must be checked prior to fixing for quality, batch no. and choice
- 2. Plaster the surface of the floor to be tiled and allow curing atleast two weeks before tiling.
- 3. While fixing pick tiles from various boxes alternatively, lay them in the desired patterns and make sure that they give an acceptable blend of colour and design. Please note that shade variation is inherent in manufacturing tiles.
- 4. For fixing tiles we recommend to use the fixing adhesives or equivalent product for the best result.
- 5. For fixing tiles in floor using conventional method, we suggest the following laying instruction:
- A: use cement and sand mortar in the ratio 1:4. Add water to create a consistent paste.
- B: Apply 20-25MM of bedding materials over the floor area of 1.0SQM at a time.
- C: Apply a thin coat of the slurry on the back of the tile to ensure proper and full bedding. Press gently for even adherence of the tiles with surface.

Do not use any heavy materials like iron or hammer to press tile.

- $\ensuremath{\mathsf{6}}\xspace$  For fixing the tools on Dado, we recommend the use of adhesive or equivalent materials.
- 7: Allow 3-4 days of bed curing after laying tiles and later fill the joints with grout.
- 8: We recommend maintaining a joint gap of 1-2mm between the tiles to allow possible thermal expansion at later stage.
- 9: Please note that company will not accept any liability in case of any problems arising out of adherence of above fixing instructions.


**DISCLAIMER**: reserves the right to delete and amend either totally or partially, any of the colours, shapes, sizes, references and other technical specifications contained in the catalogue at any time. The colours shown in this catalogue are purely illustrative and limited to printing process. Please refer actual samples before final selection. The details of colours, sizes and references should be verified for photography errors. SHADE & SIZE VARIATIONS are inherent characteristics of ceramics. NO COMPLAINTS SHALL BE ENTERTAINED ON TILES ALREADY/FIXED.

### NOTES

- \* All technical specifications in this catalogue are for premium grade materials only.
- SHADE/SIZE VARIATION are inherent characteristics to ceramics. Certain products purposely have variations that are the parts of designs and process. The same have been indicated.
- \* It is recommended to blend tiles by mixing tiles from various boxes and check for natural hue before fixing.
- \* Company's liability is also limited to the material supplied by the company; no other claim is entertained under any circumstances.
- \* No complaints shall be entertained regarding the decoration on tiles.

# TILES **LAYING PATTERN**

Tiles Size: 200x1200mm



W: CALIBRE/KALIBRE
S : 1207.0 -1209.0mm
Y : 1209.0 - 1211.0mm
X : 1211.0 - 1213.0mm
A : 1213.0 - 1215.0mm
V : 1215.0 - 1217.0mm
20x120x1 cm (GL) (Approxi Mate
5 pcs. / adet
1.20 m <sup>2</sup>









Multi - Application Strips, it can be laid in following combination by unique and artistic way.

### Helpful tips for better aesthetics look (Laying Instructions)

- 1. For better aesthetic value and for long term use, it is strongly recommended to provide 3 mm spacer in between the tiles. Without spacer, harmony of tiles might be disturbed.
- 2. Make sure that the design, pattern and the arrow marked on the back side of tiles must be in the same direction.
- 3. Any product from digitile must be installed (laid) in the same format. i.e. 200x1000mm size. For the particular series customized size application is not possible.
- \* THE COMPANY SHALL NOT BEAR ANY LIABILITY FOR THE PROBLEMS OUT OF NON-FULFILLMENT OF LAYING THE INSTRUCTIONS AS ABOVE.